


STEEL PROFILE									
2020	Sheet								
CI/SfB 27, Nh2,	23.s.4								

PROFILE DESCRIPTION -

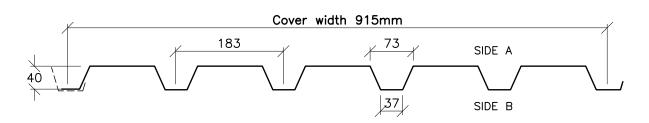

-SECTION PROPERTIES:

NOMINAL THICKNESS	mm	0.63	0.75	0.90	1.00
LOWER YIELD POINT	N/mm²	320	320	320	320
MOMENT OF INERTIA	cm⁴/m	97	113	128	159
WEIGHT INCL. SIDE LAP	kg/m²	8	9	11	13
MAXIMUM SHEET LENGTH	m	15	15	15	15

-SPAN TABLES-

(Deflection limited to Span/300)

Thickness (mm)	Span (m)	Maximum Total Load (kN/m²)													
		1.60	1.80	2.00	2.20	2.40	2.60	2.80	3.00	3.20	3.40	3.60	3.80	4.00	4.20
0.63		1.64	1.15	0.84	0.63	-	-	-	-	-	1	-	-	-	_
0.75		2.08	1.46	1.07	0.80	0.62	-	ı	-	-	ı	-	-	ı	-
0.90		2.60	1.83	1.33	1.00	0.77	0.61	-	_	_	_	_	_	_	_
1.00		3.09	2.17	1.58	1.19	0.92	0.72	0.58	-	-	-	_	_	-	_

Thickness (mm)	Span (m)	Maximum Total Load (kN/m²)													
		1.60	1.80	2.00	2.20	2.40	2.60	2.80	3.00	3.20	3.40	3.60	3.80	4.00	4.20
0.63		3.24	2.56	2.02	1.52	1.17	0.92	0.74	0.60	-	ı	-	-	ı	-
0.75		4.28	3.38	2.57	1.93	1.49	1.17	0.94	0.76	0.63	0.52	ı	ı	ı	-
0.90		5.51	4.35	3.21	2.41	1.85	1.46	1.17	0.95	0.78	0.65	0.55	ı	ı	ı
1.00		6.67	5.24	3.82	2.87	2.21	1.74	1.39	1.13	0.93	0.78	0.65	0.56	1	-

Loads are for a minimum end support width of 50mm and intermediate support width of 60mm, and can be from vertical downward loading or wind uplift. Higher values may be acceptable under certain conditions. Walkability must be taken into account when considering maximum span tables.

Contact Árchitectural Profiles Ltd regarding maximum sheet lengths available.

Please note that all dimensions and thicknesses are nominal as coated and/or as finished, and are subject to coil and manufacturing tolerances.

Please consult our experienced staff for all technical enquiries.

Whilst every endeavour is made to keep literature up to date, specifications may change without prior notice due to a policy of continued research and development.

Architectural Profiles Limited cannot be held responsible for the mis—use of span tables and its contents.

E&OE

Architectural Profiles Ltd.

53 Crockhamwell Road, Woodley, Reading,

Berks. RG5 3JP. Telephone: 0118 927 2424 Fax: 0118 927 2400

